



# Cable Reel Rollers


Cable Reel Rollers are used for rolling large cable spools, for payout, unwinding and take-up of heavy cable. LJ engineers & manufactures cable reel rollers to any capacity or specification required.

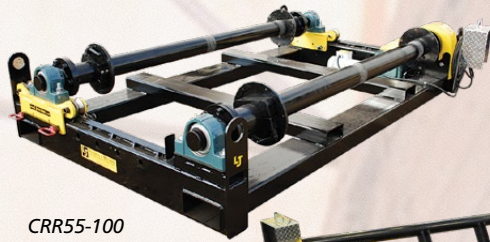

CRR55-100

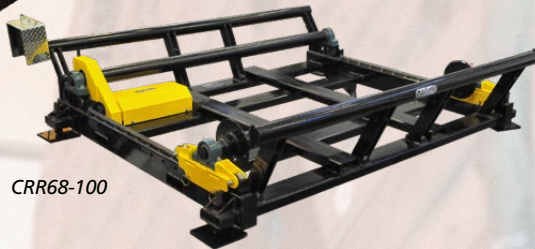

CRR68-100

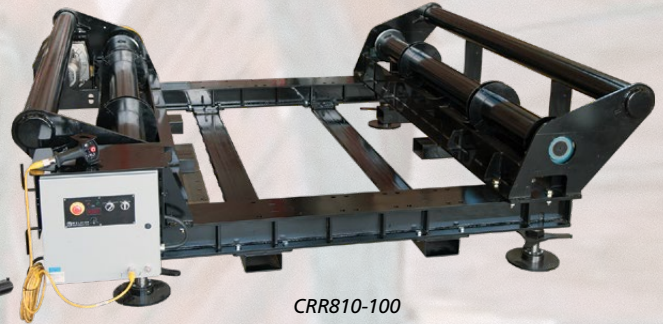

CRR810-100

## SPECIFICATIONS

|                         | CRR55-100<br>10 Ton Cable Reel Roller              | CRR68-100<br>15 Ton Cable Reel Roller              | CRR810-100<br>40 Ton Cable Reel Roller             |
|-------------------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| Load Capacity:          | 20,000 lbs                                         | 30,000 lbs                                         | 80,000 lbs                                         |
| Spool Size Range:       | 2-8 ft diameter<br>5 ft-3 in max width             | 2-12 ft diameter<br>8 ft max width                 | 5-16 ft diameter<br>10 ft max width                |
| Tractive Effort/Torque: | 2,150 lbs                                          | 3,000 lbs                                          | 8,500 lbs                                          |
| Rotation Speed:         | 30-780 in/min                                      | 48-480 in/min                                      | 48-480 in/min                                      |
| Height Range:           | Low Profile, fine adjust leveling<br>feet optional | Low Profile, fine adjust leveling<br>feet optional | Low Profile, fine adjust leveling<br>feet optional |
| Power Requirements:     | 240V, 1-ph*                                        | 240V, 1-ph*                                        | 480V, 3-ph*                                        |
| Equipment Mass:         | 2,200 lbs                                          | 3,015 lbs                                          | 6,700 lbs                                          |
| Footprint:              | 79" x 95" x 29"                                    | 99" x 134" x 22"                                   | 102" x 156" x 43"                                  |

\* 208 - 600V, 50 or 60 Hz input power options available. Specifications subject to change; consult factory for all specifications.

## Features & Options

Variable speed drive for rotational speed adjustability; input power supply to customer needs.

Adjustable reel alignment guides.

Slip clutch for gearbox and over-torque protection.

Quick adjust carriage for diameter settings.

Top quality motor/gear train, heavy duty frame.

Leveling feet (optional)  
\*Optional anti-tipping safety catch (not shown).



Best in class performance and safety features